





Station Code

BOO

Recording Station

BORDANO

Network

OX

	Year	Month	Day
First compilation	2010	04	08
Last update	2010	05	20

General Information



Station photograph

Code BOO

Owner CRS Centro di Ricerche Sismologiche, OGS

Housing

Instrumentation

Digitizer	Installation	_	
Quanterra Q330 (5576) D	2016-01-01 00:00:00		
Sensor	Installation	Orientation	Location
Kinemetrics EpiSensor ES-T (1006) SM	2016-01-01 00:00:00	ENZ	Surface
Digitizer	Installation		
Quanterra Q330 (5576) D	2016-01-01 00:00:00		
Sensor	Installation	Orientation	Location
Nanometrics Trillium 120 sec (2179) BB			

Geographical Information (1/2)

Location

Region FRIULI-VENEZIA GIULIA


Province Udine

City BORDANO

Place / Address

ISTAT Code 030012

Notes

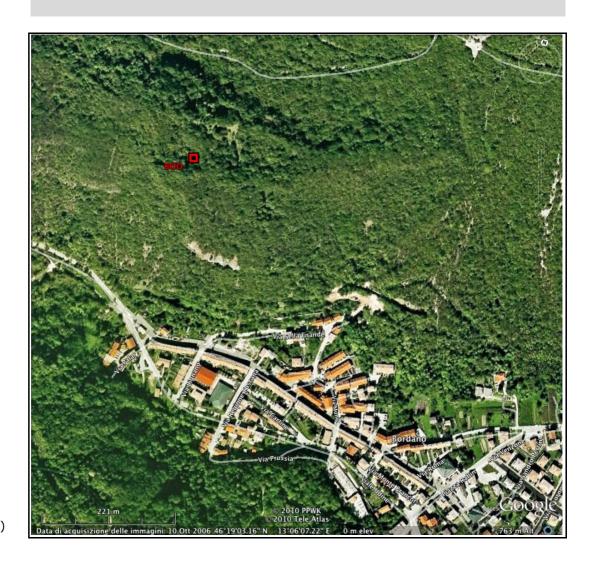


Location map (Italy and Region)

Geographical Information (2/2)

Coordinates

	Latitude	Longitude
Geographic (WGS84)	46.319513	13.098428
Elevation (m a.s.l.)	444	

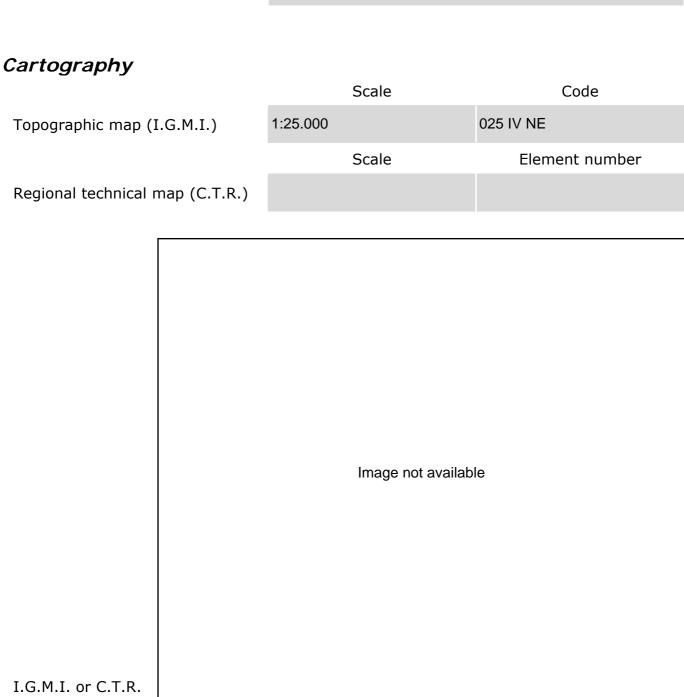

map

Geomorphology

Site morphology


Plain	Valley (centre)	X Valley (edge)	Alluvial fan
Saddle	Slope	Edge of scarp	Ridge

Landslides			
Not present			
Present	Active or quiescent	Distance (m)	
	Inactive or stabilized		
	Image not available		
I.F.F.I. map			
Notes			
Notes			

Geology

Cartography		Scale	Sheet number	Sheet name
Geological map				
		Image not available		
Fault proximity	certain supposed	(see notes for further informa-	tion)	
Notes				

Microtremor H/V spectral ratio

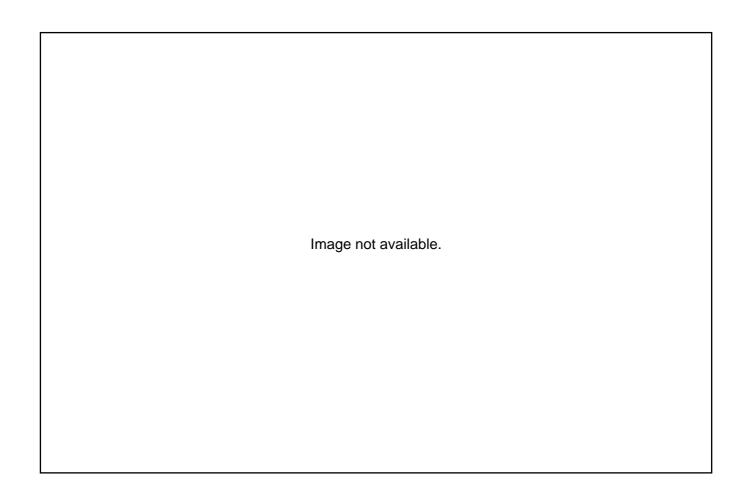

Site classification (EC8 - NTC2008)

Lithostratigraphic classification

Estimated

Method ¹	Soil class ²	Notes
GEO	A*	

1 GEO Geological data
Legend EC Empirical correlation
HV H/V spectral ratio

Based on in-situ measurements

Method ³		V _{s30} (m/s)	Soil class ²	
2 Legend A	Rock or other rock-like geological formation, including at most 5 m of weaker material at the surface ($V_{\rm s30}{>}800$ m/s).		3 Legend CH	Cross-Hole
В	Deposits of very dense sand, gravel, or very stiff clay, at least several tens		DH	Down-Hole

properties with depth (V_{s30} =360–800 m/s). Deep deposits of dense or medium dense sand, gravel or stiff clay with thickness from several tens to many hundreds of m (V_{s30} =180–360 m/s).

Deposits of loose-to-medium cohesionless soil (with or without some soft cohesive layers), or of predominantly soft-to-firm cohesive soil (V_{s30} <180 m/s).

A soil profile consisting of a surface alluvium layer with V_s values of type C or D and thickness varying between about 5 m and 20 m, underlain by stiffer material with $V_s{>}800$ m/s.

3 Legend	СН	Cross-Hole
	DH	Down-Hole
	ES	ESAC
	FK	FK
	MW	MASW
	NW	NASW
	SH	SH-Refraction
	SW	SASW

Topography classification

Topography category⁴

4 Legend T1 Flat surface, isolated slopes and cliffs with average slope angle i≤15°.

T2 Slopes with average slope angle i>15°.

T3 Ridges with crest width significantly less than the base width and average slope angle 15°≤i≤30°.

T4 Ridges with crest width significantly less than the base width and average slope angle i>30°.

Synthesis of information

Information relevant to site classification	Notes
V _{s30} (m/s)	
Average N _{SPT} to 30m	
Average c _U to 30m (kPa)	
Site class (EC8 – NTC2008)	A*
Topography category (EC8 – NTC2008)	
Geological, geomorphological and geome	chanical information
Lithology	Rock, Cretaceous limestones
Morphology	Valley Edge
Rock mass	
Other information relevant to seismic site	e response
Depth to bedrock (m)	
Average V_s to bedrock (m/s)	
f ₀ from H/V microtremors (Hz)	
f ₀ from H/V earthquakes (Hz)	
Distinctive features of site response	