





Station Code

OL₀₂

Recording Station

Massalengo

Network

OL

YearMonthDayFirst compilation20170704Last update19700101

General Information



Station photograph

Code OL02

Owner CRS Centro di Ricerche Sismologiche, OGS

Housing

Instrumentation

Digitizer	Installation		
Guralp Minimus (MIN-9855) D	2016-09-14 15:00:00		
Sensor	Installation	Orientation	Location
Guralp Fortis (TF058) SM	2016-09-14 15:00:00	ENZ	Surface
Digitizer	Installation		
Guralp Minimus (MIN-9855) D	2016-09-14 15:00:00		
Sensor	Installation	Orientation	Location
Guralp Radian (T39) BB			

Geographical Information (1/2)

Location

Region LOMBARDIA

Province Lodi

City MASSALENGO

Place / Address Massalengo

ISTAT Code 098037

Notes



Location map (Italy and Region)


Geographical Information (2/2)

Coordinates

	Latitude	Longitude
Geographic (WGS84)	45.266917	09.485002
Elevation (m a.s.l.)	73	

Cartography

		Scale	Code
Topographic map (I.G.M.I.)	1:25.000		null null
		Scale	Element number
Regional technical map (C.T.R.)			

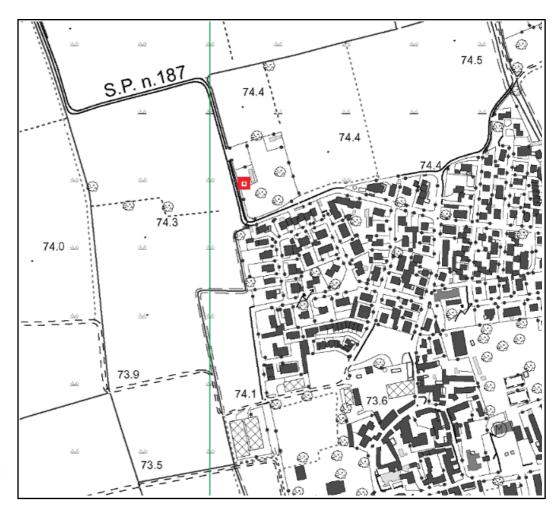

I.G.M.I. or C.T.R. map

Geomorphology

Site morphology


X	Plain	Valley (centre)	Valley (edge)	Alluvial fan
	Saddle	Slope	Edge of scarp	Ridge


Landslides		
Not present		
Procent	Active or quiescent	Distance (m)
Present	Inactive or stabilized	
	Imag	e not available
I.F.F.I. map		
Notes		

Geology


Cartography



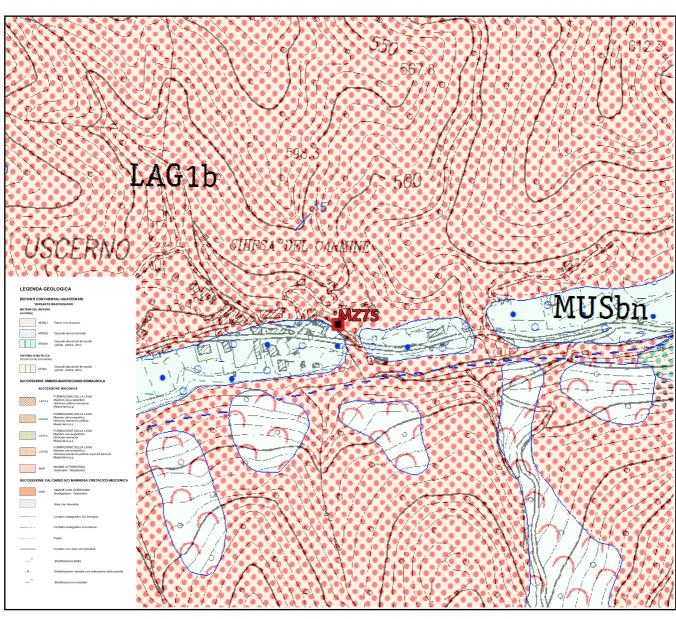

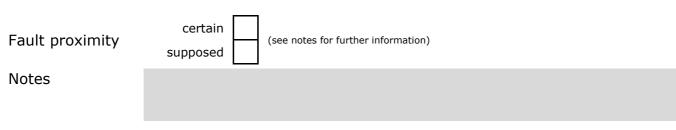

Microtremor H/V spectral ratio

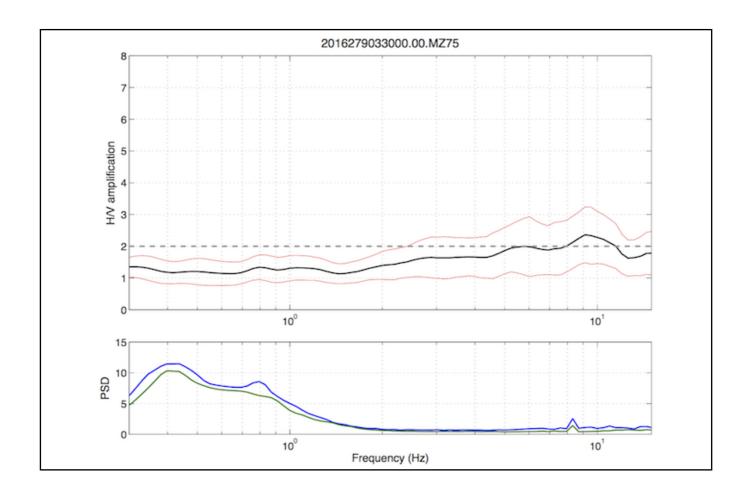

Site classification (EC8 - NTC2008)

Lithostratigraphic classification

Estimated

Method ¹	Soil class ²	Notes

1 GEO Geological data
Legend EC Empirical correlation
HV H/V spectral ratio

Based on in-situ measurements

	Method ³	V _{s30} (m/s)		Soi	l class ²
2 Legend	weaker material at the surface	gical formation, including at most 5 m of $(V_{s30}>800 \text{ m/s})$.	3 Legend	СН	Cross-Hole

B of m in thickness, characterized by a gradual increase of mechanical properties with depth (V_{s30} =360-800 m/s).

C Deep deposits of dense or medium dense sand, gravel or stiff clay with thickness from several tens to many hundreds of m (V_{s30} =180-360 m/s).

Deposits of loose-to-medium cohesionless soil (with or without some soft cohesive layers), or of predominantly soft-to-firm cohesive soil (V_{s30} <180 m/s).

A soil profile consisting of a surface alluvium layer with V_s values of type C or D and thickness varying between about 5 m and 20 m, underlain by stiffer material with $V_s{>}800$ m/s.

3 Legend	СН	Cross-Hole
	DH	Down-Hole
	ES	ESAC
		FK
	MW	MASW
	NW	NASW
	SH	SH-Refraction
	SW	SASW

Topography classification

Topography category⁴

4 Legend T1 Flat surface, isolated slopes and cliffs with average slope angle i≤15°.

T2 Slopes with average slope angle i>15°.

T3 Ridges with crest width significantly less than the base width and average slope angle 15°≤i≤30°.

T4 Ridges with crest width significantly less than the base width and average slope angle i>30°.

Synthesis of information

Information relevant to site classification	Notes
V _{s30} (m/s)	
Average N _{SPT} to 30m	
Average c _U to 30m (kPa)	
Site class (EC8 - NTC2008)	
Topography category (EC8 - NTC2008)	T1
Geological, geomorphological and geome	chanical information
Lithology	
Morphology	Plain
Rock mass	
Other information relevant to seismic site	e response
Depth to bedrock (m)	
Average V_s to bedrock (m/s)	
f ₀ from H/V microtremors (Hz)	
f ₀ from H/V earthquakes (Hz)	
Distinctive features of site response	